


8" OPEN APERTURE HID



FEATURES

- Die cast aluminum plaster frame and socket cap
- Adjustable mounting brackets with 24" telescoping hanger straps included
- Dual access prewired junction box with 1/2" and 3/4" pryout KOs, ground wire and insulation detector
- Reflectors .05" thick high purity aluminum specular with anodized finish
- Electronic ballast (MH) enclosed "F-Can" style HPF class "P" ballast (HPS)
- Ships complete with lamp

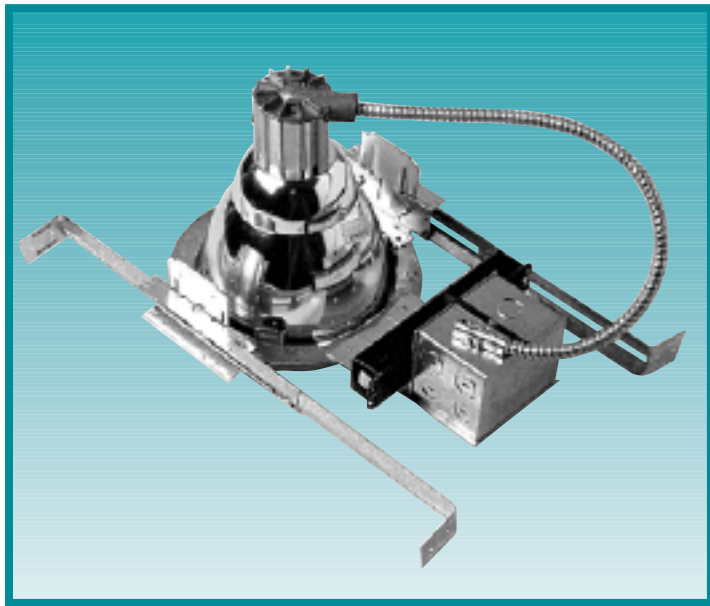

Fixture Specifications

ORDERING INFORMATION

SAMPLE CATALOG NUMBER

RHD8 X XX 120/277 XX

Series Lamp Source Wattage/Source Voltage Options

SERIES

RHD8 8" Open Aperture Downlight

LAMP SOURCE

L Metal Halide
H High Pressure Sodium

WATTAGE/SOURCE

50 50 watt MH med. base open fixture rated ED17
44 70 watt MH med. base E17/B17 open fixture rated ED17 PAR 30, 38
45 100 watt MH med. base open fixture rated ED17 PAR 30, 38
47 175 watt MH med. base open fixture rated ED17

WATTAGE/SOURCE con't

31 50 watt HPS med. base open fixture rated ED17¹
32 70 watt HPS med. base open fixture rated ED17
33 100 watt HPS med. base open fixture rated ED17
34 150 watt HPS med. base open fixture rated ED17

VOLTAGE


120/277 120/277V

OPTIONS

11² Emergency Standby Relay & Socket

¹ 50 watt HPS 277V only.
² Relay is wired standard to light incandescent standby T4 mini-can lamp when HID lamp arc extinguishes. Relay can be field bypassed for remote 120 volt source to T4 mini-can incandescent standby lamp.

DIMENSIONS

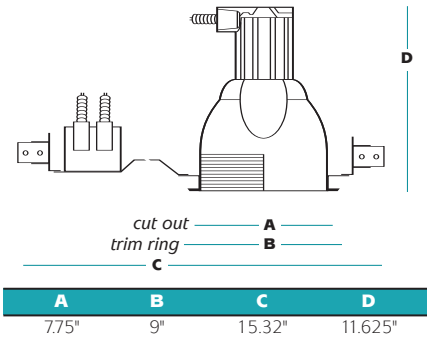

TRIM ORDERING INFORMATION

SAMPLE CATALOG NUMBER

A 8 XX X

Trim Type Aperture Size Trim Finish Trim Ring

TRIM TYPE

A Adjustable

APERTURE SIZE

8 8" Aperture

TRIM FINISH

AR Low iridescent clear specular anodized
WR White painted reflector
73 White painted reflector with C73T tempered prismatic glass lens & white splay trim

TRIM RING

W White powder paint aluminum trim ring
S Self flange, same finish as trim



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642

www.securitylighting.com



AR Specular anodized with white trim ring



WR White painted reflector



73 White painted reflector with C73T tempered prismatic glass lens & white splay trim