


# 851/852/8614 SERIES



The 851/852 Series is a universal mount recessed fixture that requires no framing and is perfect for new construction or retrofit in any type of ceiling material. It features a removable top for easy installation and maintenance, and is available with a vented cover-up to hide previously existing fixture openings in retrofit applications. Aluminum housing and door frame provide specification grade quality and longevity in a competitively priced and in-stock luminaire.

The 8614 Series offers the same features in a smaller housing for narrow soffits. Like its 851 Series counterpart, it requires no framing and is perfect for new construction or retrofit in any type of ceiling material.

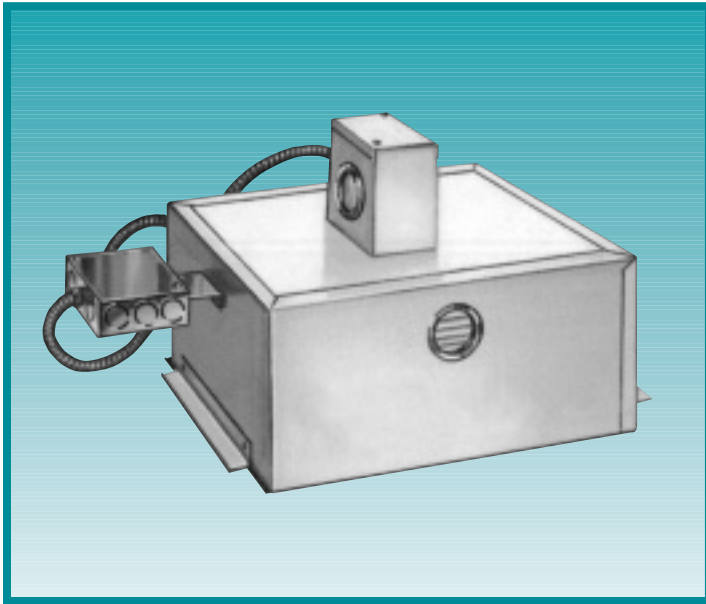


## Fixture Specifications

### FEATURES

- One-piece, corrosion resistant aluminum door frame with retainer cable
- Weatherproof powder-coat finish
- Aluminum housing
- UL listed, suitable for damp locations
- Available vented cover-up
- Mounting hardware included
- Vertical lamp has 60% longer lamp life (852 Series)
- Lamp included
- Pre-wired junction box (14GA, CRS)
- Removable outlet box and socket assembly (852 Series)
- **Now available in LED**

### DIMENSIONS

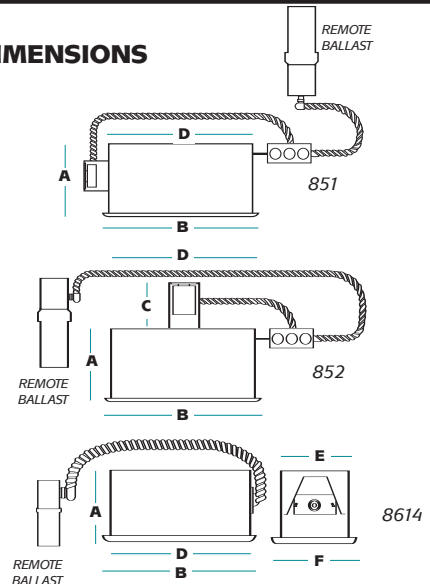

	A	B	C	D	E	F
<b>851</b>	5.75"	14.5"	-	13.0"	-	-
<b>852</b>	6.125"	14.5"	4.0"	13.0"	-	-
<b>8614</b>	6.0"	14.5"	-	13.0"	6.5"	8.0"

### ORDERING INFORMATION

#### SAMPLE CATALOG NUMBER

**8XXX XX XXXXXX XX XX XX XXX**

Series    Mounting    Wattage/Source    Lens    Application    Finish    Voltage

#### SERIES

<b>852</b>	Vertical Lamp
<b>851</b>	Horizontal Lamp / LED
<b>8614</b>	Horizontal Lamp

#### MOUNTING

<b>WW</b>	Wall Wash
<b>DL</b>	Downlight

#### WATTAGE/SOURCE<sup>1</sup>

<b>100PMH</b>	100 watt pulse start metal halide
<b>175PMH</b>	175 watt pulse start metal halide
<b>100HPS</b>	100 watt high pressure sodium
<b>150HPS</b>	150 watt high pressure sodium
<b>42</b>	42 watt LED <sup>3</sup>

#### LENS

<b>FP</b>	Flat temp. Prismatic
-----------	----------------------

#### APPLICATION

<b>OW</b>	Plywood, Drywall, Plaster
<b>AL</b>	Aluminum

#### FINISH<sup>2</sup>

<b>WH</b>	White
<b>PS</b>	Platinum Silver
<b>DB</b>	Dark Bronze

#### VOLTAGE

<b>120</b>	120 Volt
<b>277</b>	277 Volt

<sup>1</sup> Consult factory for other lamp wattage/source options.  
<sup>2</sup> Consult factory for other finishes.  
<sup>3</sup> Available in 851 Series only.



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642

## INSTALLATION INSTRUCTIONS



*Place remote ballast on nearest ceiling joist.*



*Disengage fixture top, raise fixture through opening and insert (4) "L" angles through crossed slots.*



*Use tab and bottom of fixture to sandwich ceiling material. Tighten screw. (No framing required.)*



*Drop flex through top of fixture and make all connections to 1900 box provided.*



*Install lamp, hinged door frame and lens.*



*Swing door frame to closed position and tighten screws.*



*Door frame with FP lens*



*Vented cover-up with screen*



A HUBBELL LIGHTING, INC. COMPANY

**Performance Designed Lighting Products**

[www.securitylighting.com](http://www.securitylighting.com)

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642