

# LARAMIE




## Fixture Specifications

### FEATURES

- The LFS Series is the wide, uniform beam lighting solution for sign, façade and general lighting of smaller areas, in die-cast aluminum.
- A wide variety of lighting systems is offered, including pulse start metal halide, compact fluorescent, high pressure sodium, and LED packages. These systems allow the designer a wide range in lumen, energy and maintenance considerations.
- Cataloged in four standard finishes, the LFS fixture can be ordered to blend or contrast with most architectural elements. The Lekrocote® powder paint system features 800 Series powder for long life and minimum surface change.
- CSA certified to UL 1598, suitable for use in wet locations.

### DIMENSIONS

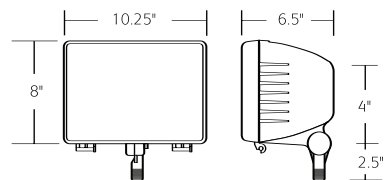

### ORDERING INFORMATION

#### SAMPLE CATALOG NUMBER

**LFS**

Series

**XXXX**

Wattage/Source

**X**

Voltage

**XX**

Color

**L**

Lamp

**XX**

Options

**XX**

Accessories

#### SERIES

**LFS** = Laramie

#### LAMP TYPE/WATTAGE

<b>50P</b>	50 watt pulse start metal halide
<b>70P</b>	100 watt pulse start metal halide
<b>100P</b>	100 watt pulse start metal halide
<b>150P</b>	150 watt pulse start metal halide
<b>50S</b>	50 watt high pressure sodium
<b>70S</b>	70 watt high pressure sodium
<b>100S</b>	100 watt high pressure sodium
<b>150S</b>	150 watt high pressure sodium
<b>26F</b>	26 watt compact fluorescent <sup>1</sup>
<b>32F</b>	32 watt compact fluorescent <sup>1</sup>
<b>42F</b>	42 watt compact fluorescent <sup>1</sup>
<b>6LW</b>	6 watt LED wide beam <sup>2</sup>
<b>12LW</b>	12 watt LED wide beam <sup>2</sup>
<b>6LN</b>	6 watt LED narrow beam <sup>2</sup>
<b>12LN</b>	12 watt LED narrow beam <sup>2</sup>

<sup>1</sup> Available in 8 (Quad-Tap<sup>®</sup>) voltage only.  
<sup>2</sup> Available in 1 (120V) voltage only.

#### VOLTAGE

<b>1</b>	= 120V
<b>6</b>	= Tri-Tap
<b>8</b>	= Quad-Tap

#### COLOR

<b>BZ</b>	= Bronze
<b>BL</b>	= Black
<b>WH</b>	= White
<b>PS</b>	= Platinum Silver

#### LAMP

<b>L</b>	= Lamp included (standard)
----------	----------------------------

#### OPTIONS

Fuse	
<b>P(1)</b>	= 120V Button photocontrol
<b>P(2)</b>	= 208V Button photocontrol
<b>P(3)</b>	= 240V Button photocontrol
<b>P(4)</b>	= 277V Button photocontrol
<b>P(6)</b>	= 347V Button photocontrol

#### ACCESSORIES (ORDER SEPARATELY)

<b>PBT-1</b>	Button photocontrol 120V
<b>PBT-234</b>	Button photocontrol 208, 240, 277V
<b>NM-BC</b>	Non-metallic box and cover burial box with cable connectors
<b>S-302-M51</b>	2" pipe (2 3/8" O.D.) slip-fitter with 1/2" top hub for LFS/LFP, bronze
<b>S-302-M52</b>	2" pipe (2 3/8" O.D.) slip-fitter with 1/2" top hub for LFS/LFP, white
<b>S-302</b>	2" pipe (2 3/8" O.D.) slip-fitter with 1/2" top hub for LFS/LFP, platinum/gray
<b>S329B</b>	Wet location surface box with cover, (4) side and (1) cover 1/2" hub, nat. alum.
<b>1031-3</b>	Portable spike with 1/2" top hub and 6ft cord set, platinum/gray finish
<b>LFP-JB-BZ</b>	Round pole-side junction box with hardware, 1/2" cover and bottom hub, bronze



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

[www.securitylighting.com](http://www.securitylighting.com)

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642