

MEDALLION 1



Fixture Specifications

- Architectural, one-piece die-cast aluminum housing with nominal .125" wall thickness. Contour lines and radius corners complete unique design.
- Die-cast aluminum door hinges to housing and secures with two, captive screws. Clear, flat or convex, tempered glass lens seals to door and housing with one-piece silicone gasketing.
- Specular, anodized aluminum reflectors for horizontal lamp, provide Type III, IV, or V square light patterns~ and for vertical lamp provide Type IV or V square light patterns. IESNA full cutoff lighting classification achieved with flat lens
- Die-cast aluminum arm for pole mount features access door to facilitate installation. Wall mount available with cast aluminum bracket and arm. Mast arm fitter for 2 3/8" OD horizontal arm available.
- Mogul porcelain socket, pulse rated, with spring-loaded, nickel-plated center contact and reinforced lamp grip screw shell.
- CWA type, HPF ballast, starting rated at -20°F (-40°F for HPS).
- Durable Lektrocote® TGIC thermoset polyester powder coat paint finish assures long life and maintenance-free service.
- UL 1598 listed for outdoor use in wet locations.

See page back of page for dimensional data.

ORDERING INFORMATION

SAMPLE CATALOG NUMBER

CM **XXXXX** **XXX** **XX** **X** **X** **XX** **L**
 Series Mounting Lamp/Wattage Lamp Orient./Distribution Lens Voltage Color Lamp

SERIES

CM = Medallion 1

MOUNTING

- A5** Arm Mount (incl. 5" rigid arm not acceptable for 90° configuration)
A10° Arm mount (incl. 10" rigid arm)
AD6 Decorative Arm Mount (incl. 6" decorative upswept arm, not acceptable for 90° configuration)
WBA5 Wall Bracket Construction with 5" straight arm
WBA10 Wall Bracket Construction with 10" straight arm
WBAD6 Wall Bracket Construction with 6" decorative upswept arm
MAF Mast Arm Fitter (for 2-3/8" OD horizontal mast arm)
0 No arm or wall bracket (only order w/o arm or wall bracket when mounting component is ordered as an accessory)

LAMP TYPE/WATTAGE

- P10** 100 watt pulse start metal halide
P17^{1,2} 175 watt pulse start metal halide
P25 250 watt pulse start metal halide
P32 320 watt pulse start metal halide
P40 400 watt pulse start metal halide
S10 100 watt high pressure sodium
S15 150 watt high pressure sodium
S25 250 watt high pressure sodium
S40 400 watt high pressure sodium

ORIENT./DISTRIBUTION

- H3** Horiz. III - (segmented)
H4 Horiz. IV - (multi-piece)
H5 Horiz. V (square) (hydroformed)
V4 Vert. IV (multi-piece)
V5 Vert. V (square) (segmented)

LENS

- F³** = Flat
C² = Convex
R² = Convex Quick Release

VOLTAGE

- Q⁴** Quad - Tap® 120/208/240/277V
T⁴ Tri - Tap® 120/127/347V CSA
5 480V

COLOR

- Standard:
DB Dark Bronze
BL Black
WH White
PS Platinum Silver
CC Custom Color (consult factory)

LAMP

L = Lamp included (standard)

- 1 Must use ED-17 lamp for vertical orientation with flat lens
- 2 Vertical lamp only
- 3 Vertically lamped units available with medium base ED-17 lamps up to 200w PMH and 150w HPS
- 4 Factory wired for highest voltage unless specified
- 5 Required for 90° configurations



A HUBBELL LIGHTING, INC. COMPANY


Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642

OPTIONS

Catalog No.	Description
F1	120V
F2	208V
F3	240V
F4	277V
F5	480V
F6	347V
P1	Photo Button 120V
P2	Photo Button 208V
P3	Photo Button 240V
P4	Photo Button 277V
P6	Photo Button 347V
PR1	Photo Cell Receptacle 120V
PR2	Photo Cell Receptacle 208V
PR3	Photo Cell Receptacle 240V
PR4	Photo Cell Receptacle 277V
PR5	Photo Cell Receptacle 480V
PR6	Photo Cell Receptacle 347V
RPA2	Round Pole Adapter (2 3/4 - 3 1/8")
RPA3	Round Pole Adapter (3 1/4 - 3 3/4")
RPA4	Round Pole Adapter (3 7/8 - 4 1/2")
RPA5	Round Pole Adapter (5")
RPA6	Round Pole Adapter (6")
L	Lamp (included)
OZ	Quartz
RP	Removable Ballast Panel
TL	Tool-Less Door/Reflector Panel
VG	Vandal Guard (flat lens only)
HS	Internal House-Side Shield (flat lens only)

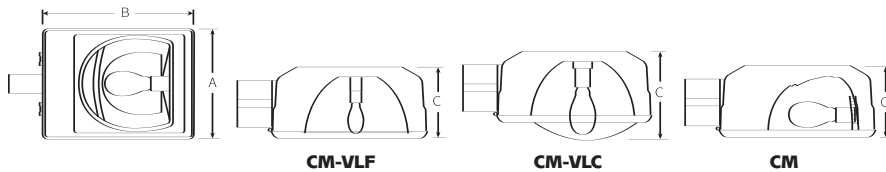

	A	B	C	EPA	Wt./Lbs.
CM	16"	21.75"	10"	1.9	39
CM-VLC	16"	21.75"	13.25"	2.0	41
CM-VLF	16"	21.75"	10"	1.9	39



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642