

# MEDALLION 2



## Fixture Specifications

- Architectural, one-piece die-cast aluminum housing with nominal .125" wall thickness. Contour lines and radius corners complete unique design.
- Die-cast aluminum door hinges to housing and secures with two, captive screws. Clear, flat or convex, tempered glass lens seals to door and housing with one-piece silicone gasketing.
- Specular, anodized aluminum reflectors for horizontal lamp, provide Type II, III, IV, or V square light patterns~ and for vertical lamp provide Type I, III, IV or V square light patterns. IESNA full cutoff lighting classification achieved with flat lens
- Die-cast aluminum arm for pole mount features access door to facilitate installation. Wall mount available with cast aluminum bracket and arm. Mast arm fitter for 2 3/8" OD horizontal arm available.
- Mogul porcelain socket, pulse rated, with spring-loaded, nickel-plated center contact and reinforced lamp grip screw shell.
- CWA type, HPF ballast, starting rated at -20°F (-40°F for HPS).
- Durable Lektrocote® TGIC thermoset polyester powder coat paint finish assures long life and maintenance-free service.
- CSA certified for outdoor use in wet locations.

## ORDERING INFORMATION

### SAMPLE CATALOG NUMBER

**CM2**   **XXXXX**   **XXX**   **XXX**   **X**   **X**   **XX**   **F4**   **L**  
 Series   Mounting   Lamp/Wattage   Lamp Orient./Distribution   Lens   Voltage   Color   Options

See page back of page for dimensional data.

### SERIES

**CM2** = Medallion 2

### MOUNTING

- A5** Arm Mount (incl. 5" rigid arm not acceptable for 90° configuration)  
**A10** Arm mount (incl. 10" rigid arm)  
**AD6** Decorative Arm Mount (incl. 6" decorative upswept arm, not acceptable for 90° configuration)  
**WBA5** Wall Bracket Construction with 5" straight arm  
**WBA10** Wall Bracket Construction with 10" straight arm  
**WBAD6** Wall Bracket Construction with 6" decorative upswept arm  
**0** No arm or wall bracket (only order w/o arm or wall bracket when mounting component is ordered as an accessory)

### LAMP TYPE/WATTAGE

- P40** 400 watt pulse start metal halide  
**P75** 750 watt pulse start metal halide  
**H1K** 1000 watt metal halide  
**S40** 400 watt high pressure sodium  
**S75** 750 watt high pressure sodium  
**S1K** 1000 watt high pressure sodium

### ORIENT./DISTRIBUTION

- H2P<sup>1,3</sup>** Horiz. II - (segmented)  
**H3P<sup>1,3</sup>** Horiz. III - (segmented)  
**H4<sup>3</sup>** Horiz. IV - (multi-piece)  
**H4P<sup>3</sup>** Horiz. IV - (multi-piece)  
**H5<sup>1</sup>** Horiz. V (square) (hydroformed)  
**H5P<sup>1,3</sup>** Horiz. V (square) (segmented)  
**V1P<sup>1,4</sup>** Vert. I (segmented)  
**V3P<sup>1,4</sup>** Vert. III (segmented)  
**V4<sup>4</sup>** Vert. IV (multi-piece)  
**V5P<sup>1,4</sup>** Vert. V (square) (segmented)

### LENS

**F** = Flat   **C** = Convex

### VOLTAGE

- Q<sup>2</sup>** Quad - Tap® 120/208/240/277V  
**5<sup>2</sup>** 480V  
**T<sup>2</sup>** Tri - Tap® 120/127/347V CSA

### COLOR

- Standard:  
**DB** Dark Bronze  
**BL** Black  
**WH** White  
**PS** Platinum Silver  
**CC** Custom Color (consult factory)

### LAMP

**L** = Lamp included (standard)

1 Performance Series optics.  
 2 Factory wired for highest voltage unless specified.  
 3 Flat lens configurations only.  
 4 Convex lens configurations only.



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

[www.securitylighting.com](http://www.securitylighting.com)

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642

## OPTIONS


Catalog No.	Description
<b>W1</b>	120V Wiring Prep
<b>W2</b>	208V Wiring Prep
<b>W3</b>	240V Wiring Prep
<b>W4</b>	271V Wiring Prep
<b>W5</b>	480V Wiring Prep
<b>W6</b>	347V Wiring Prep
<b>RPA2</b>	Round Pole Adapter (2 3/4 - 3 1/8")
<b>RPA3</b>	Round Pole Adapter (3 1/4 - 3 3/4)
<b>RPA4</b>	Round Pole Adapter (3 7/8 - 4 1/2")
<b>RPA5</b>	Round Pole Adapter (5")
<b>RPA6</b>	Round Pole Adapter (6")
<b>F1</b>	Fusing - 120V
<b>F2</b>	Fusing - 208V
<b>F3</b>	Fusing - 240V
<b>F4</b>	Fusing - 277V
<b>F5</b>	Fusing - 480V
<b>F6</b>	Fusing - 347V
<b>P1</b>	Photo Button - 120V
<b>P2</b>	Photo Button - 208V
<b>P3</b>	Photo Button - 240V
<b>P4</b>	Photo Button - 277V
<b>P6</b>	Photo Button - 347V
<b>PR1</b>	Photo Cell Receptacle - 120V
<b>PR2</b>	Photo Cell Receptacle - 208V
<b>PR3</b>	Photo Cell Receptacle - 240V
<b>PR4</b>	Photo Cell Receptacle - 277V
<b>PR5</b>	Photo Cell Receptacle - 480V
<b>PR6</b>	Photo Cell Receptacle - 347V
<b>OZ</b>	Quartz Restrike with 150W DC bayonet lamp (not available w/ 50Hz ballast, 600W HPS or 750W HPS systems)
<b>HS<sup>6</sup></b>	Internal House Side Shield (H2P, H3P, H4, H4P distrib.)
<b>TL</b>	Touch Latch - tool-free entry (not for ground relamping)
<b>RP</b>	Removable Powr-Panl <sup>®</sup>
<b>VG</b>	Polycarbonate Vandal Guard (flat lens only)
<b>L</b>	Lamp

### Mast Arm Fitter

**MAF-CM-XX** Bracket for 2 3/8" OD horizontal mast arm

6 V4 optics include H5 shield standard

Note: All poles to be drilled with #2 pattern.

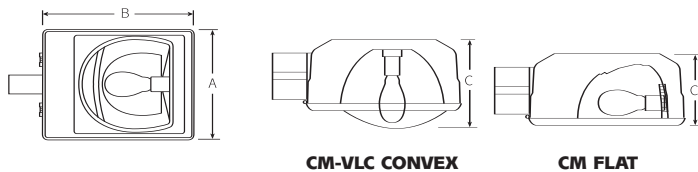

	A	B	C	EPA	Wt./Lbs.
<b>CM FLAT</b>	21.38"	29.44"	11.16"	2.6	77
<b>CM-CONVEX</b>	21.38"	29.44"	15.75"	2.8	80



A HUBBELL LIGHTING, INC. COMPANY

**Performance Designed Lighting Products**

[www.securitylighting.com](http://www.securitylighting.com)

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642