

P SERIES EXIT



An LED exit never looked this good. The ultra-thin profile, optically designed graphics and universal chevron arrows deliver maximum directional information. Housing and canopy feature a snap-together design for easy installation. Damp location listed.




Fixture Specifications

FEATURES

- Optically designed graphics and universal chevron arrows provide maximum directional information
- Housing and canopy feature snap-together design for easy installation
- Enclosure constructed of durable, non-yellowing, fire-resistant thermoplastic with bright white textured finish
- Battery powered model includes precision regulated charger, test switch, AC/charge indicator, and maintenance-free NiCd battery
- Damp location listed

DIMENSIONS

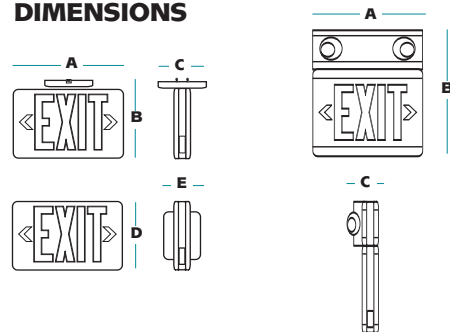

A	B	C	D	E
12.25"	8.0"	5.25"	7.5"	1.75"
(311mm)	(203mm)	(133mm)	(190mm)	(44mm)

A	B	C
13"	9"	1.875"
(330mm)	(229mm)	(48mm)

ORDERING INFORMATION

SAMPLE CATALOG NUMBER

P | **X** | **X** | **XXX**
 Series | Letter color | Operation | Option

SERIES

P Thermoplastic LED exit sign

LED

R Red LED

G Green LED

OPERATION

A AC only

B Battery pack

C Combo unit

OPTION

ADA FAI (24V DC), beeper, flash

ACCESSORIES

(Must be ordered separately)

Catalog Number	Description
PP6	Pendant kit (white, 6")
PP12	Pendant kit (white, 12")
SW	Special wording (consult factory)
WG-W	Wireguard - wall mount, AC/battery
WG-C	Wireguard - ceiling mount, AC/battery
WG-E	Wireguard - end mount, AC/battery
WG-L	Wireguard - wall mount (combo)
WG-S	Wireguard - wall mount (AC/battery)



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642