

PVL SERIES



The PVL Series is an economical, cost effective luminaire that combines efficient lighting and aesthetic appearance. It is designed for maximum spacing between luminaires and can provide good uniformity at a six-to-one spacing-to-mounting height ratio.

Ideally suited for rear-building exterior wall and area lighting for office buildings, retail shopping centers, restaurants, banks, warehouses, and parking garages.




Fixture Specifications

FEATURES

- Removable one-piece UV-stabilized door and prismatic lens for full front access
- Impact resistant door/lens
- One-piece aluminum housing for long life and cool operation
- Standard bronze finish
- Accessory mounting bracket for single and twin pole mounted luminaires
- Ships complete with lamp

DIMENSIONS

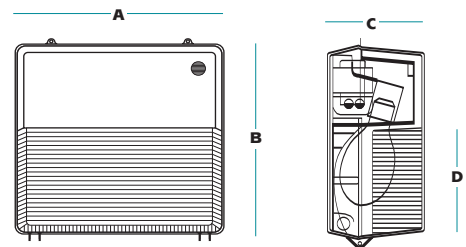

A	B	C	D
14.5"	14.0"	7.125"	6.0"

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Weight lbs.
HIGH PRESSURE SODIUM			
PVL-070S-128L	70	Quad/AL (HPF)	17
PVL-100S-128L	100	Quad/AL (HPF)	18
PVL-150S-128L	150	Quad/AL (HPF)	18
PULSE START METAL HALIDE			
PVL-070P-128L	70	Quad/Pulse Start (HPF)	17
PVL-100P-128L	100	Quad/Pulse Start (HPF)	17
PVL-150P-128L	150	Quad/Pulse Start (HPF)	18

ACCESSORIES

Catalog Number	Description
PBT	Photocontrol (must specify voltage)
PVLV	Full cutoff visor, formed aluminum, bronze finish
200-0180-9904	Replacement polycarbonate lens assembly



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642