


# TRACK CONNECTORS



No right/left "L" or "T" required. No set starting point - connectors start at any location. All connectors are line and neutral aligned, simply feed one or two circuits at starting point - no other wiring modifications are needed.

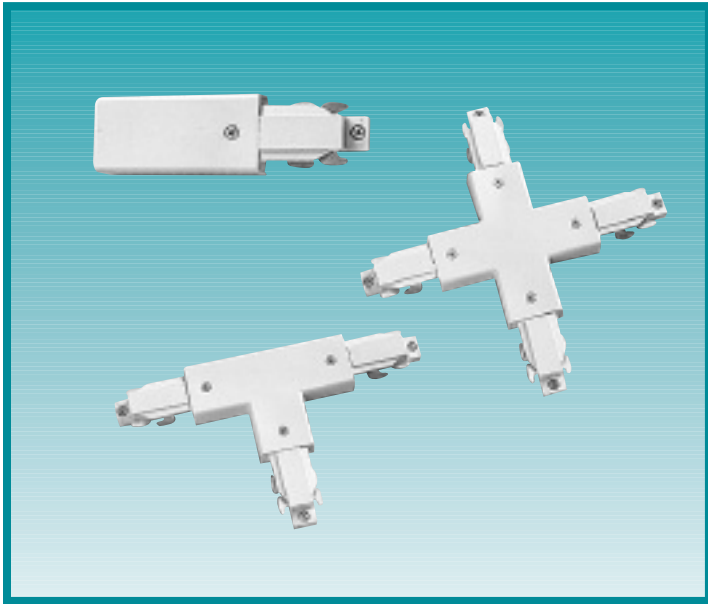

## ORDERING INFORMATION

### SAMPLE CATALOG NUMBER



### TRACK

**AK** Track

### TRACK COMPONENT

**T** Track Component

- 1 Live-end with cord is a non-listed CSA NRTL/C component.
- 2 Connector can be used as straight power feed or "L" power feed. Supplied with separate straight and "L" covers.
- 3 Can be used as a power feed location.


### CONNECTOR TYPE

<b>EF<sup>3</sup></b>	Live-End Connector
<b>IL</b>	In-Line Connector
<b>SL<sup>2,3</sup></b>	Straight/L Connector
<b>T<sup>3</sup></b>	T-Connector
<b>X<sup>1</sup></b>	X-Connector
<b>F</b>	Flex Connector
<b>CF<sup>3</sup></b>	Conduit End Feed
<b>CL<sup>1</sup></b>	Live-End Connector w/ cord

### COLOR

<b>WH</b>	White
<b>BL</b>	Black
<b>Z</b>	Stainless Steel

## DIMENSIONS

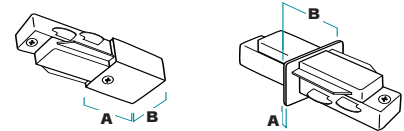


AKTEF

AKTIL

A	B
3.125"	1.5"

A	B
3.125"	1.5"




AKTSL

AKTT

A	B	C
1.5"	3.0"	4.5"

A	B	C
0.078"	1.5"	4.5"

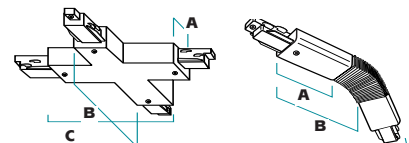


AKTX

AKTF

A	B	C
1.5"	4.437"	4.437"

A	B	C
3.125"	5.5"@90°	1.5"

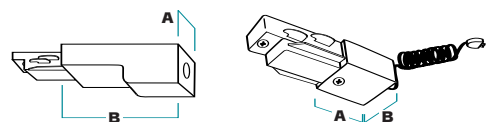

AKTCF

AKTCL

A	B
1.5"	3.125"

A	B
3.125"	1.5"



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642

[www.securitylighting.com](http://www.securitylighting.com)

# TRACK MOUNTING ACCESSORIES

## Specifications

### ORDERING INFORMATION

#### SAMPLE CATALOG NUMBER

**AK** **T** **XXX** **XX**  
 Track Component Connector Type Color



#### TRACK

**AK** Track

#### TRACK COMPONENT

**T** Track Component

<sup>1</sup> Order as AKT TBC only, finish is polished chrome.

#### CONNECTOR TYPE

**TBC<sup>1</sup>** T-Bar Mounting Clips  
**PFC** Power Feed Cover  
**EC** End Cap  
**FF** Floating Canopy Feed Kit  
**PFCC** Track Power Feed Canopy Cover  
**WC** Stem Wire Cover  
**MP** Monopoint Adapter  
**PA** Pendant Adapter


#### COLOR

**WH** White  
**BL** Black  
**Z** Stainless Steel

### DIMENSIONS




**AKT TBC**  
**T-BAR MOUNTING CLIPS**  
 (4 per package)  
 Allows for simple installation of track on T-bar ceilings. Comes in chrome finish only.




**AKT MP**  
**MOUNTING ADAPTER**  
 Allows track heads to be used as pendant fixtures without track rail.

A	B
5.0"	0.4375"




**AKT PFC**  
**POWER FEED COVER FOR T-BAR CEILING**  
 For T-bar installation. Use with any power feed connector for surface T-bar installation

A	B
4.875"	0.9375"




**AKT PFCC**  
**TRACK POWER FEED CANOPY COVER**  
 Use with any connector at power feed recessed junction box.

A
5.0" sq.



**AKT EC**  
**END CAP**  
 (2 per package)  
 For single run installations or floating canopy feed runs


A	B
1.5"	0.75"



**AKT WC**  
**STEM WIRE COVER**  
 Use one each at stem power feed location to enclose wiring from stem to power feed.

A	B
0.875"	8.625"


C
1.375"



**AKT FF**  
**FLOATING CANOPY FEED KIT**  
 Allows power feed location at any position in track system. Mounts over two gang box and can be connected to one or two circuits.

A	B
4.25"	4.25"

C	D
2.25"	1.375"




**AKT PA**  
**PENDANT ADAPTER**  
 Allows connection to pendant light fixtures (by others) to track.

A	B
1.5"	3.187"

### STEM KIT

Allows suspension of track below finished ceiling. Kit contains two canopy covers and hardware, two track mounting brackets, hardware and covers, two 1/2" OD thread and finished pendant stems. (Consult factory for ordering information.)



### TRACK WAND

Extension wand allows suspension of light fixtures below track rail. (Consult factory for ordering information.)



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642