



CIMARRON

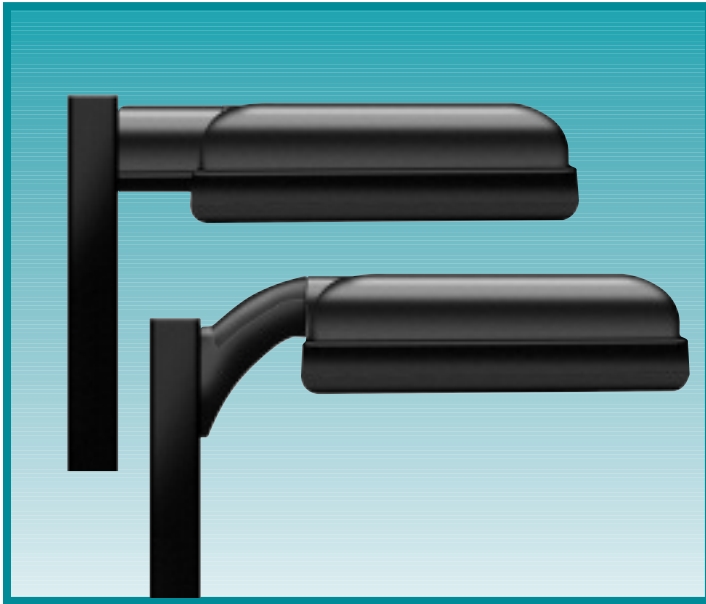

Fixture Specifications

- Die-cast aluminum housing with radius corners.
- Die-cast aluminum door with clear, flat tempered glass lens, fully gasketed to housing. Hinged door secured with two captive screws.
- IES Type II, III, IV and V (square) light distributions.
- Flat lens design for full cutoff control
- 175 watt to 400 watt lamps in HPS, MH Super MH and Pulse Start for design flexibility.
- Mounts on upswept or straight arms for poles or on wall bracket for uniform project look.
- Mogul porcelain socket, pulse rated with spring-loaded, nickel-plated center contact and reinforced lamp grip screw shell.
- CWA type, HPF ballast, starting rated at -20 °F (-40 °F for HPS).
- TGIC thermoset polyester powder paint finish with choice of five standard and two premium standard colors.
- UL and CSA listed for wet locations.
- Ships complete with lamp.

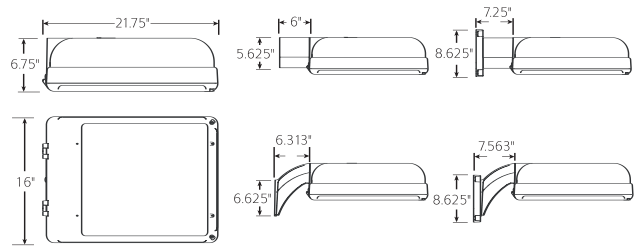

EPA = 1.2

ORDERING INFORMATION

SAMPLE CATALOG NUMBER

CR1 XX XXXXXX XX F X XX L
 Series Mounting Lamp/Wattage Lamp Orient./Distribution Lens Voltage Color Lamp

SERIES
CR1 = Cimarron

MOUNTING
A = Arm Mount (6" straight rigid arm)
AD = Decorative Arm Mount (6" decorative upswept arm)
WB = Wall Bracket (includes wall bracket and 6" straight arm unless WBAD option is chosen which substitutes Decorative Upswept Arm)

LAMP TYPE/WATTAGE
100PMH 100 watt pulse start metal halide
150PMH 150 watt pulse start metal halide
250PMH 250 watt pulse start metal halide
320PMH 320 watt pulse start metal halide
400PMH 400 watt pulse start metal halide
100HPS 100 watt high pressure sodium
150HPS 150 watt high pressure sodium
250HPS 250 watt high pressure sodium
400HPS 400 watt high pressure sodium

LAMP ORIENT./DISTRIBUTION
H3 = Horizontal Lamp Type 3
H4 = Horizontal Lamp Type 4
H5 = Horizontal Lamp Type 5

LENS
F = Flat

VOLTAGE
Q = Quad-Tap
5 = 480V
T = Tri-Tap

COLOR
 Standard:
WH = White
DB = Dark Bronze
PS = Platinum Silver
BL = Black
 Custom Color:
 Consult Factory

LAMP
L = Lamp included (standard)



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642