

# UNDER CANOPY LUMINAIRE



Security's UCL Series is designed for service station canopies or commercial surface-mount applications. The glass refractor and vertical burn lamp are engineered to provide uniform, high-angle brightness to attract and welcome customers. Available in pulse start and standard metal halide, the UCL series is an efficient, energy saving, safety and security lighting fixture that's easy to install and maintain. Modular accessories allow the standard UCL fixture to install virtually anywhere, making lighting upgrades cost-effective and desirable.




## Fixture Specifications

### FEATURES

- Superior refractor design optimizes light distribution for safety and identity
- Rugged, lightweight die cast aluminum ballast assembly runs cool and provides long component life
- Tool-free entry with hinged cover
- Gaskets provide watertight seal to mounting surface, ballast assembly, and lens
- Built-in handles
- NRTL/C certified for wet locations
- Finished in white Lekrocote® scratch-resistant powder paint
- Self-centering for one-person installation
- Lamp included

### DIMENSIONS - UCL

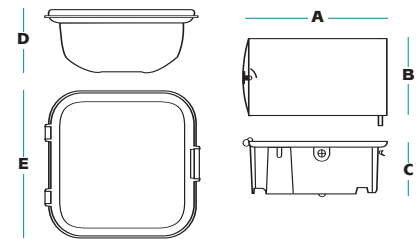

A	B	C	D	E
14.0"	7.50"	5.0"	6.125"	14.25"

### ORDERING INFORMATION (PETROLEUM CANOPY INSTALLATION)

Catalog Number	Wattage	Voltage	Power Factor	Weight	
				lbs.	kg
<b>METAL HALIDE</b>					
<b>UCL-400P8W-L</b>	400PS	120/208/240/277 (MT)	HPF	35.0	15.75
<b>UCL-400H8W-L</b>	400MH	120/208/240/277 (MT)	HPF	35.0	15.75
<b>UCL-320P8W-L</b>	320PS	120/208/240/277 (MT)	HPF	35.0	15.75
<b>UCL-250H8W-L</b>	250MH	120/208/240/277 (MT)	HPF	33.0	14.85


NOTE: • Fixtures have white trim; consult factory for optional finishes.

### ORDERING INFORMATION (SURFACE-MOUNT INSTALLATION)

Catalog Number	Wattage	Voltage	Power Factor	Weight	
				lbs.	kg
<b>METAL HALIDE</b>					
<b>UCLSM-400P8W-L</b>	400PS	120/208/240/277 (MT)	HPF	35.0	15.75
<b>UCLSM-400H8W-L</b>	400MH	120/208/240/277 (MT)	HPF	35.0	15.75
<b>UCLSM-320P8W-L</b>	320PS	120/208/240/277 (MT)	HPF	35.0	15.75
<b>UCLSM-250H8W-L</b>	250MH	120/208/240/277 (MT)	HPF	33.0	14.85
<b>UCLSM-175H8W-L</b>	175MH	120/208/240/277 (MT)	HPF	33.0	14.85

NOTE: • Fixtures have white trim; consult factory for optional finishes.

### DIMENSIONS - UCLSM



A	B	C
14.25" sq.	5"	6.125"



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

[www.securitylighting.com](http://www.securitylighting.com)

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642